JC07 Rec'd PCT/PTO 2 1 DEC 2001

FORM PTO-1390 (Modified) (REV 11-2000) U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371

ATTORNEY'S DOCKET NUMBER	
112740-390	
U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR	
10/019584	
INTERNATIONAL APPLICATION NO: PCT/DE00/02019	INTERNATIONAL FILING DATE 21 June 2000
PRIORITY DATE CLAIMED 22 June 1999	

TITLE OF INVENTION

ALTERNATING UPLINK/DOWNLINK TRANSITIONS IN CHANNEL ALLOCATION IN A TDD TRANSMISSION FRAME WITH A NUMBER OF SWITCHING TIMES

APPLICANT(S) FOR DO/EO/US

Dieter Emmer et al.

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
   a. ☒ is attached hereto (required only if not communicated by the International Bureau).
   b. ☐ has been communicated by the International Bureau.
   c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
   a. ☒ is attached hereto.
   b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
   a. ☐ are attached hereto (required only if not communicated by the International Bureau).
   b. ☒ have been communicated by the International Bureau.
   c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
   d. ☐ have not been made and will not be made.
8. ☒ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).
11. ☒ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☒ A copy of the International Search Report (PCT/ISA/210).

Items 13 to 20 below concern document(s) or information included:

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☒ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
20. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
21. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
22. ☒ Certificate of Mailing by Express Mail
23. ☐ Other items or information:

531 Rec'd PCT 21 DEC 2001

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR)	INTERNATIONAL APPLICATION NO.	ATTORNEY'S DOCKET NUMBER
10/019584	PCT/DE00/02019	112740-390

24. The following fees are submitted:.

BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :	CALCULATIONS PTO USE ONLY
☐ Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO $1040.00	
☒ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO $890.00	
☐ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO $740.00	
☐ International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) $710.00	
☐ International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) $100.00	
ENTER APPROPRIATE BASIC FEE AMOUNT =	$890.00
Surcharge of **$130.00** for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).	$0.00

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	
Total claims	13 - 20 =	0	x $18.00	$0.00
Independent claims	2 - 3 =	0	x $84.00	$0.00
Multiple Dependent Claims **(check if applicable)**.			☐	$0.00
TOTAL OF ABOVE CALCULATIONS =				$890.00
☐ Applicant claims small entity status. See 37 CFR 1.27). The fees indicated above are reduced by 1/2.				$0.00
SUBTOTAL =				$890.00
Processing fee of **$130.00** for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (f)). +				$0.00
TOTAL NATIONAL FEE =				$890.00
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) **(check if applicable).** ☐				$0.00
TOTAL FEES ENCLOSED =				$890.00
			Amount to be: refunded	$
			charged	$

a. ☒ A check in the amount of **$890.00** to cover the above fees is enclosed.

b. ☐ Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees. A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. **02-1818** A duplicate copy of this sheet is enclosed.

d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

William E. Vaughan (Reg. No. 39,056)
Bell, Boyd & Lloyd LLC
P.O. Box 1135
Chicago, Illinois 60690-1135

SIGNATURE

William E. Vaughan
NAME

39,056
REGISTRATION NUMBER

December 21, 2001
DATE

10/019584

Rec'd PCT/PTO 21 DEC 2001

BOX PCT

IN THE UNITED STATES ELECTED/DESIGNATED OFFICE
OF THE UNITED STATES PATENT AND TRADEMARK OFFICE
UNDER THE PATENT COOPERATION TREATY-CHAPTER II

PRELIMINARY AMENDMENT

APPLICANTS:	Dieter Emmer	DOCKET NO: 112740-390
SERIAL NO:		GROUP ART UNIT:
		EXAMINER:
INTERNATIONAL APPLICATION NO:		PCT/DE00/02019
INTERNATIONAL FILING DATE:		21 June 2000
INVENTION:	ALTERNATING UPLINK/DOWNLINK TRANSITIONS IN CHANNEL ALLOCATION IN A TDD TRANSMISSION FRAME WITH A NUMBER OF SWITCHING TIMES	

Assistant Commissioner for Patents,
Washington, D.C. 20231

Sir:

Please amend the above-identified International Application before entry into the National stage before the U.S. Patent and Trademark Office under 35 U.S.C. §371 as follows:

In the Specification:

Please replace the Specification of the present application, including the Abstract, with the following Substitute Specification:

SPECIFICATION

TITLE OF THE INVENTION

ALTERNATING UPLINK/DOWNLINK TRANSITIONS IN CHANNEL ALLOCATION IN A TDD TRANSMISSION FRAME WITH A NUMBER OF SWITCHING TIMES

BACKGROUND OF THE INVENTION

The present invention relates to a method for controlling uplink/downlink transitions in channel allocation in a transmission frame, particularly a TDD transmission frame, and a communications system for carrying out the method.

20050 "4854001

In radio communications systems, information (for example, voice, image information or other data) are transmitted with the aid of electromagnetic waves via a radio interface between the transmitting and receiving radio station (base station or mobile station, respectively). The electromagnetic waves are radiated at carrier frequencies which are in the frequency band provided for the respective system. In the case of GSM (Global System for Mobile Communication), the carrier frequencies are in the range of 900, 1800 or 1900 MHz, respectively. For future mobile radio networks with CDMA or TD/CDMA transmission methods via the radio interface, for example the UMTS (Universal Mobile Telecommunications system) or other third-generation systems, frequencies in the frequency band of approximately 2000 MHz are provided.

Frequency Division Multiple access (FDMA), Time Division Multiple Access (TDMA) or a method known as Code Division Multiple Access (CDMA) are used for distinguishing between the signal sources and, thus, for evaluating the signals. A particular instance of the time division multiple access is a TDD (Time Division Duplex) transmission method in which the transmission takes place in a common frequency band separated in time both in the uplink, i.e. from the mobile station to the base station, and in the downlink, i.e. from the base station to the mobile station.

In the TDD system, uplink and downlink time slots are located within one transmission frame. Assuming that only one frequency band (one carrier frequency) is available to an operator, time slot clustering can be introduced in a channel assignment method in order to be able to guarantee the reusability of the channel (i.e., time slot) with a certain spacing. The channel allocation method has the task of distributing the available resources, on the one hand, to the cells (which occurs on a rather slow time axis) and, on the other hand, to allocate one (or more) resource(s) for a particular connection (service). The method proposed in the text which follows is classed as the former, in particular.

For two adjacent cells Z1 and Z2, shown in Figure 1, with base stations BS and mobile stations MS, particularly strong interferences are obtained from a mobile station MS which is close by in the adjacent cell, with synchronous

20050404.1607

alignment of the transmission frames of the adjacent stations or cells for a mobile station MS which receives signals from its associated base station BS. This case, which occurs quite frequently with a homogeneous distribution of the mobile stations, is critical especially at the cell boundaries.

According to Figure 2, interferences are obtained for the constellation where the transmit case TX of a mobile station MS overlaps the receive case RX of the other mobile station MS. A switching point SP in each case separates the transmit case TX and the receive case RX. For a frame-by-frame transmission, one frame fr having a number of time slots ts, the duration of the occurrence of interferences depends on the displacement of the beginning of the frame and position of the switching point SP between the two cells Z1, Z2. Strong interferences cause losses in the spectral efficiency of the radio communications system.

In common TDD methods, therefore, there is frame synchronization and no variable switching time but a fixed switching time so that a fixed allocation exists within the communication network (e.g., time slots 0-11 for downlink, 12-23 for uplink).

Frame synchronization alone, however, does not yet lead to optimum results if the requirements for the capacity utilization are different in adjacent cells. In particular, the case is unsolved in which relatively large data volumes are to be transmitted in the uplink in one cell but relatively large data volumes are to be transmitted in the downlink in adjacent cells.

From US 5,719,859, a TDMA radio communications system is known in which a single base station communicates with a multiplicity of mobile stations within its transmitting range. In this arrangement, individual channels of a transmission frame are variably allocated to the mobile stations in dependence on load. Furthermore, it is specified to include within a transmission frame its time slots for uplinks from the beginning of the transmission frame and to include its time slots for downlinks from its end to its beginning. Each time slot is only allocated for a single mobile station and only for a single transmit direction.

An extension of this communications system to a cellular communications system having a multiplicity of adjacent cells is known from WO 98/29988 A1. In

20050-1855.001

this document, it is proposed to group a multiplicity of radio cells and sectors within it in the manner of a cluster. In the arrangement, sectors of two different cells are, in each case, directly adjacent so that a cluster of two is formed. Furthermore, it is specified to subdivide the transmission frames into two subframes, one subframe being expressly used only for either uplinks or downlinks. Furthermore, it is specified to assign the two subframes to the different sectors. Accordingly, it is possible during one frame either only to receive or only to transmit in the sector of each cell independently of the other statements. For the next frame, in consequence, the transmit direction must be reversed for the entire transmission frame.

The resources are assigned in accordance with a similar basic principle as in US 5,719,859, but in this case only a distribution of packet data to these subframes is specified and not an assignment of channels of a TDD system.

The present invention is, therefore, directed toward providing an improved method and an improved communications system, particularly a radio communications system, in which the switching points between uplink and downlink transmission times can be selected more variably in adjacent cells.

SUMMARY OF THE INVENTION

In its basic concept, the TDD transmission method can also support asymmetric services in which the transmission capacity in the uplink does not need to be equal to that in the downlink. If this asymmetry is not wanted to the same extent in all radio cells, a critical interference scenario can arise. The considerations relating to the TDD transmission method had failed to recognize the relevant problems of the mutual interferences of a multiplicity of base stations and mobile stations operated within the same frequency band.

A method is proposed here which provides an optimum distribution of the time slots within the transmission frame (particularly, the TDD transmission frame) and at the same time enables the following two criteria to be achieved at the same time:

1. Changing uplink/downlink conditions can be taken into consideration by a variable switching point between the uplink and downlink time slots within a cell almost independently of the switching points of the other cells.

2. A changing load distribution in the network can be made possible by extending the access time for a connection in one cell or, in other words, by allocating a different number of channels (time slots) per cell in reuse.

Due to the condition of aligned uplink or downlink direction in adjacent active cells or cell groups, the two criteria do not lead to the problem of co-channel interference in the form of mutual interference of two mobile stations in directly adjacent cells of different reused clusters, one of which is transmitting exactly on the channel (time slot) on which the other one is receiving at the same time. The same applies to interference between base stations when both are transmitting or receiving on the same time slot.

Using the solution proposed here, the TDD mode can now be implemented via only one frequency.

The proposed combination of separate switching points per cell (see case a in the text which follows) and of the advantage of an unchanged link direction of the same time slots (see case b in the text which follows) makes it possible that the unwanted MS-MS interferences will not occur both in the case of a change in the uplink/downlink (UL/DL) ratio in the cell and in the case of a load change (different resource distribution over the cells in the cluster). To this end, this method uses a number of switching points (one per cell) with alternating UL/DL change of successive cell-related channel allocations within the transmission frame (see case c).

In clusters of three or four, only the switching points of up to three or four cells or groups of cells need to be correspondingly matched to one another in each case.

Additional features and advantages of the present invention are described in, and will be apparent from, the following Detailed Description of the Invention and the Figures.

BRIEF DESCRIPTION OF THE FIGURES

Figure 1 shows two cells with one base station and one mobile station each.

Figure 2 shows the case of interference between two adjacent mobile stations, one of which is transmitting and the other one is receiving at the same time.

Figure 3 shows a block diagram of a mobile radio system.

Figure 4 shows a mobile radio system according to a first exemplary embodiment in a macro environment with a cluster of three and the associated transmission frames with a number of switching points.

Figure 5 shows this mobile radio system and its transmission frame with a number of switching points and a different number of time slots per cell with interference.

Figure 6 shows this mobile radio system and its transmission frame with a common switching point and a different number of group time slots per cell.

Figure 7 shows this mobile radio system and its transmission frame with a different switching point in each case per transmission frame and a different number of time slots per cell in an interference situation.

Figure 8 shows this mobile radio system and its transmission frame with a number of switching points with the same link direction of adjacent cells.

Figure 9 shows this radio system and its transmission frame with a number of time-variable switching points with tolerable interference.

Figure 10 shows this mobile radio system and its transmission frame with a number of time-variable switching points and a different number of time slots per cell with tolerable interference.

Figure 11 shows, according to a further exemplary embodiment, a different scenario with microenvironment and a cluster of three with transmission frame.

Figure 12 shows an exemplary scenario with microenvironment and a cluster of two with transmission frame.

Figure 13 shows a mobile radio system with a medium time slot reuse distance of 4.

Figure 14 shows a block diagram of a control device.

20050704-0956004

DETAILED DESCRIPTION OF THE INVENTION

As can be seen from Figure 3, an exemplary mobile radio communications system consists of a multiplicity of mobile switching centers MSC which are networked together or, respectively, establish access to a fixed network PSTN. Furthermore, these mobile switching centers MSC are connected to, in each case, at least one device RNM for allocating radio engineering resources. Each of these devices RNM, in turn, provides for a connection to at least one base station BS. The term base station in its widest interpretation can be interpreted only as the site of, for example, a transmitting antenna. Such a base station BS can set up a connection to other radio stations; e.g., mobile stations MS or other mobile and stationary terminals via a radio interface. Each base station BS forms at least one radio cell Z. In the case of sectorization or with hierarchical cell structures, a number of radio cells Z are also supplied per base station BS; e.g., for part-areas around the base station BS.

Figure 3 shows exemplary connections V1, V2, V3 for transmitting user information and signaling information between mobile stations MS1, MS2, MS3, MSn and a base station BS. An operation and maintenance center OMC implements control and maintenance functions for the mobile radio network or parts thereof, respectively. The functions of this structure can be transferred to other communications systems, particularly radio communications systems in which the method below can be used, and particularly for subscriber access networks with wireless subscriber loop.

Figure 4 and the subsequent figures show a mobile radio system with macroenvironment typical of the ideal, and the associated transmission frames from its cells Z. According to the ETSI simulation rules for macro and microenvironment in UMTS 30.03, macroenvironment refers to a high mast, which clearly protrudes over the roof edge of houses, being used for transmitting and receiving. In this connection, $N = 16$ is assumed to be the number of time slots available in the transmission frame and, furthermore, a cluster of three cell division is provided which will be called cells R (dotted), G (shaded to the right) and B (shaded to the left) in the text which follows. Each cell also has a particular

number of uplink and downlink time slots (e.g., $n_u(R)$ is assumed to be the number of uplink time slots per cell R).

In the representation, a first central cluster in the cell mapping is shown dotted, with shading to the left or shading to the right depending on group and with regard to the transmission allocation in the upper diagram for the purpose of illustration. Compared with other clusters surrounding this cluster, this central cluster is surrounded by a frame. Regarding the transmission allocation, the transmission parameter of the other adjacent clusters are shown in the lower diagram in each case. White circles represent the positions of the base stations BS with sector antennas which, in each case, supply three surrounding cells Z (R, G, B) which are typically shown diagrammatically as hexagons for the purpose of simplification.

However, alternative arrangements are also possible such as, for example, the arrangement of, in each case, a separate base station with an omnidirectional antenna in the center of each individual cell.

The method proposed here is shown in individual stages via the subsequent steps and figures for the purpose of clarity of explanation.

Case a: Figure 4 shows a clustering with a number of switching points; i.e., each cell both in the cluster and in reuse has its own UL/DL switching point. In this arrangement, the switching points can be different within each cell of a group of cells compared with the switching points of the other group members. The number of time slots per cell, however, is still fixed. All cells are allocated the same number of resources. The transmission frames of the adjacent cells of the three groups are suitably controlled synchronously in such a manner that all transmission frames simultaneously begin with time slot 1 for transmitting general information of the base stations to mobile stations in the corresponding cells in the downlink.

Using multiple switching points, i.e. a separate switching point per cell, ensures a situation of minimum interference with changing uplink/downlink relationships. If the switching point is shifted, MS/MS interference will arise between adjacent mobile stations but a minimum distance D is maintained between

the mobile stations so that the interference situation is relatively noncritical. As an example, transmission in the fourth channel or time slot will be quoted where a cell of the central group transmits in the downlink but the adjacent cells of this group transmit in the uplink, with a minimum distance D. MS/MS interference between two mobile stations in the same cell groups and with the same transmission channel is thus permissible due to the minimum distance D.

If, however, given this channel allocation strategy, it is intended to take into account an inhomogeneous load distribution which leads to a change in the number of channels, i.e. shift the time slots of a cell with little traffic volume into a cell with a large traffic volume within the cluster, this minimum distance is no longer given under certain conditions as shown in Figure 5. The critical MS/MS interferences will occur here since the number of time slots per cell changes within reuse in such a manner that the MS/MS interference for time slots 7 and 8, i.e. for cells of different groups, exists to its full extent in this case since the minimum distance D is no longer given.

Case b:a channel allocation method according to Figure 6 which uses only one switching point, i.e. groups the time slots for uplink and downlink, is better suited with respect to a changing distribution of the time slots to the cells while at the same time ensuring minimum interference. Due to the joint switching of the transmit direction in all cells, there can be no MS/MS interferences. For example, there can be a different distribution of the time slots to the three sectors at each site within one transmit direction in Figure 6. It is now possible to violate the minimum reuse distance, e.g., in the downlink between cells of different direction; i.e., a mobile station MS is simultaneously receiving data or signals from two adjacent base stations. For mobile stations close to their base station, this does not represent a problem because the level differences are adequate. The mobile stations located in the center between supplying and interfering base station so that they receive approximately the same signal levels can be allocated undisturbed; i.e., in particular, different time slots in which these collisions cannot occur.

If, in contrast, the switching point changes, it is possible that, in addition to the lacking minimum distance D, the abovementioned MS/MS interference also

20050405.1057.001

occurs as shown in Figure 7. If the switching point in the reuse cluster changes due to another UL/DL ratio, they will be correspondingly extremely disturbing MS/MS interferences with only one switching point per transmission frame and grouped uplink/downlink time slots.

Case c: if the advantages of the two methods are combined, an allocation arrangement is obtained which has no problematic MS/MS interferences in the case of a change of the UL/DL ratio and changing traffic volumes. This optimized method provides for a number of variable switching points, on the one hand, but also a minimization of the situation that there is simultaneous transmission and reception, respectively, (MS/MS interference) in the same channel (time slot) in directly adjacent cells. As shown in Figure 8, this can be achieved by the fact that the transmit direction does not change in the time slots at the boundary to the next cell in the cluster or preferably in the entire communication network of the environment (as at b). That is, if, for example, the last time slot belonging to cell G is in the uplink, the first time slot belonging to cell R also must be in the uplink. There will then not be any UL/DL change at the cell boundaries within the transmission frame. This provides an alternating UL/GL allocation for cell B, DL/UL allocation for cell G and again UL/DL allocation for the next cell in the cluster. Figure 8 thus represents a hybrid method with alternating UL/DL changes for successive cells in the transmission frame.

If then the ratio of uplink/downlink time slots in a cell is changed as is shown in Figure 9, there will admittedly be MS/MS interferences but the minimum distance D is maintained; i.e., the situation of having mutually interfering mobile stations in immediate vicinity is avoided. That is to say, in this hybrid method, alternating UL/DL changes are possible for successive cells in the transmission frame, the UL/DL switching point being shifted within the cell.

The second critical application is the allocation of a different number of resources in the different cells due to traffic volumes which differ locally. In this case, shown in Figure 10, the minimum distance is admittedly no longer given but MS/MS interference in which the same time slot is used for different transmit directions in the immediate vicinity is avoided, nevertheless. Thus, a hybrid

20050405F001

method with alternating UL/DL changes for successive cells in the transmission frame is also possible in which the number of resources per cell is differently distributed in the reuse cluster.

The hybrid method thus provides for combining of the two cases a and b, that is to say a number of switching points (preferably, but not necessarily, only one per cell) with alternating UL/DL changes of successive cell-specific channel allocations within the transmission frame.

As a further exemplary embodiment, another scenario of a cluster of three in a microenvironment as Manhatten grid network with exemplary transmission frame is shown in Figure 11. Microenvironment here refers to the transmitting and receiving antennas being clearly arranged below the roof edges and being used for supplying streets between blocks of houses. The white lines here represent the streets and the dotted boxes represent blocks of houses. The antennas, which are preferably arranged away from street intersections between two blocks of houses each are used, as a rule, not for supplying the blocks but the streets. The transmission arrangement corresponds to that of Figure 10 in this case.

Figure 12 represents a further exemplary Manhatten scenario but here with a cluster of two, and a corresponding transmission frame. The arrangement of base stations within the cells is as in the previous example.

According to a further exemplary embodiment, Figure 13 shows another exemplary cell arrangement with a typical instance of cells in a real network with medium reuse of four. In this arrangement, arbitrary cell forms with variable numbers of adjacent cells which, for example, can be supplied with time slots in a medium reuse of four (compare the four-color theorem) are instanced in accordance with the inhomogeneous propagation conditions of real radio environments. That is, in this arrangement, it is assumed that, instead of three groups of cells to be matched to one another, four groups R, G, B, W of cells are formed, the switching points and switching directions, as shown in the transmission frame, can be matched to one another in accordance with the hybrid allocation method from case c.

The base station BS contains a transceiver device TX/RX shown in Figure 14, which digital/analog-converts the transmit signals to be radiated, translates them from the baseband into the frequency range of radiation and modulates and amplifies the transmit signals. A signal generating device SA has first assembled the transmit signals into radio blocks and allocated them to the corresponding frequency channel and time slot. A signal processing device DSP evaluates receive signals received via the transceiver device GX/RX and performs a channel estimation.

For the signal processing, the receive signals are converted into symbols having a discreet set of values; for example, digitized. A signal processing device DSP which contains as digital signal processor, for example, a JD processor for detecting the user information and the signaling information in accordance with the JD (Joint Detection) CDMA method, evaluates the data sections. The interaction of the components and the setting of the switching point SP is controlled by a control device SE of the base station BS. Associated data on the switching point SP and the actual situations of the link are temporarily stored in a memory device MEM.

The mobile station MS contains, correspondingly adapted, the modules explained for the base station BS and additionally an operating panel T. At the operating panel T, the subscriber can make inputs, among other things an input for activating the mobile station MS or for setting up a connection to the base station BS.

The control device SE evaluates signals sent in the downlink and received by the mobile station MS and signals sent from the mobile station to the base station and determines the requirement for data to be transmitted in the DL and in the UL. The channels to be used and the switching points are established in accordance with the requirement. These data are preferably transmitted to the communicating device. Furthermore, the channels and switching points to be allocated are matched to the base stations of the adjacent cells. In an exemplary control method, a coarse pregrouping of the resources is first carried out on a slow time axis for a cluster of three. The number of time slots remaining after the BCCH time slot is advantageously divided by three and assigned to the individual cell

20050-1856.001

groups. This coarse grouping can also be different if there is a corresponding requirement.

After that, a repeated determination is made on a faster time axis, i.e. in short time intervals, for checking current requirements, what allocation requirements exist for a cell and its adjacent cells. The resources are then correspondingly allocated and required switching points established for these cells; i.e., the original resources of adjacent cells are allocated for a first cell and/or the time slot is shifted for the switching.

Alignment via the adjacent base stations themselves would be associated with a very high and frequent exchange of data among them. A central control of the resources and channel allocations and switching points for a multiplicity of base stations by, for example, the devices RNM for allocating radio engineering resources or the mobile switching centers MSC to which the current load conditions and resource requirements are in each case transmitted by the base stations BS is, therefore, simpler.

In the extreme case, control also could be handled by the mobile stations but is then disadvantageously expensive.

Precontrol of the switching points and signaling to the communicating stations can take place, for example, via the BCCH (Broadcast Control Channel) in the downlink.

Although the present invention has been described with reference to specific embodiments, those of skill in the art with recognize that changes may be made thereto without departing from the spirit and scope of the invention as set forth in the hereafter appended claims.

20050-4057.001

ABSTRACT OF THE DISCLOSURE

A method for controlling uplink/downlink transitions in channel allocation in a transmission frame for information transmission in a communications system having a multiplicity of cells, in which a switching point between uplink and downlink transitions is controlled in alignment with the respective switching point of adjacent cells in such a manner that the same uplinks and downlinks are predetermined in directly adjacent cells. A load-dependent control of the uplink and downlink within individual adjacent cells or groups of cells becomes possible via a variable activation of possibly a number of switching points and/or resources of the individual cells which are switched to be active. The cells are preferably arranged for this purpose in a cluster of three or four arrangement, a number of time-variable switching points (one each per cell) being used with alternating uplink and downlink change of successive cell-related channel allocations within the transmission frame.

In the Claims:

On page 15, cancel line 1 and substitute the following left hand justified heading therefore:

CLAIMS

Please cancel claims 1-13, without prejudice, and substitute the following claims therefore:

14. A method for controlling a channel allocation in transmission frames having a plurality of channels for information transmission in a communications system having a plurality of cells, the method comprising the steps of:

ordering the cells into cell groups and forming clusters from each of the cell groups in a cell;

allocating to each cluster a transmission frame, the channels of which are allocated to the cells of the respective cluster such that the channels are variably allocated to the cells within the cluster, the channels are jointly allocated to the cells within the cluster and each allocation takes place for, optionally, one of an uplink and a downlink; and

leaving a link direction the same in, respectively, the uplink and the downlink in the case of channel assignment to another cell in the cluster.

15. A method for controlling a channel allocation in transmission frames as claimed in claim 14, the method further comprising the step of using time slots of a TDD transmission frame as channels.

16. A method for controlling a channel allocation in transmission frames as claimed in claim 14, the method further comprising the step of controlling switching points between uplinks and downlinks within one of a cell and a group of cells in dependence on changing load distributions in at least one of the cell, the group of cells, and the communication network, wherein a different number of channels per, respectively, the cell and the cell group is allocated.

17. A method for controlling a channel allocation in transmission frames as claimed in claim 14, the method further comprising the step of controlling a number of switching points between uplinks and downlinks within a group of cells independently in time and variable of the switching points of one of the adjacent cells and to the groups of cells.

18. A method for controlling a channel allocation in transmission frames as claimed in claim 14, wherein one of the cells and the group of cells are arranged in a cluster of three arrangement.

19. A method for controlling a channel allocation in transmission frames as claimed in claim 18, the method further comprising the step of matching the switching points between uplinks and downlinks within one of a cell and a group of cells to up to three groups of active adjacent cells.

20. A method for controlling a channel allocation in transmission frames as claimed in claim 14, wherein one of the cells and the group of cells are arranged in a cluster of four arrangement.

21. A method for controlling a channel allocation in transmission frames as claimed in claim 20, the method further comprising the step of matching the switching points between uplinks and downlinks within one of a cell and a group of cells to up to three groups of active adjacent cells.

22. A method for controlling a channel allocation in transmission frames as claimed in claim 14, wherein one of the cells and the group of cells are arranged in a cluster of two arrangement.

23. A method for controlling a channel allocation in transmission frames as claimed in claim 14, wherein, when the cells are arranged in a plurality of clusters, only cells of different cell groups are arranged directly adjacently from

20050704.0515401

cluster to cluster and, is directly adjacent and simultaneously active cells of different clusters, transmission takes place in a same transmit direction.

24. A method for controlling a channel allocation in transmission frames as claimed in claim 14, the method further comprising the step of controlling a number of time-variable switching points with alternating uplink and downlink change by successive cell-related channel allocations within a transmission frame such that a direction of connection of active and directly adjacent cells is in each case the same.

25. A cellular radio communications system, comprising:

at least one base station;

at least one mobile station;

devices for allocating radio engineering resources;

at least one mobile switching center; and

circuits in at least one of the base station, the mobile station, the devices for allocating radio engineering resources and the mobile switching center, the circuits being for controlling a channel allocation in transmission frames having a plurality of channels for information transmission in the communications system, which has a plurality of cells, wherein the cells are ordered into cell groups and clusters are formed from each of the cell groups, a transmission frame is allocated to each cluster, the channels of the transmission frame being allocated to the cells of the respective cluster such that the channels are variably allocated to the cells within the cluster, the channels are jointly allocated to the cells within the cluster and each allocation takes place for, optionally, one of an uplink and a downlink and, in the case of a channel assignment to another cell in the cluster, a link direction is left the same in, respectively, the uplink and the downlink.

26. A cellular radio communications system as claimed in claim 25, further comprising antennas, in the base stations, having a restricted directional pattern and being arranged for avoiding weak interferences.

20050041607

20050-1255.001

REMARKS

The present amendment makes editorial changes and corrects typographical errors in the specification, which includes the Abstract, in order to conform the specification to the requirements of United States Patent Practice. No new matter is added thereby.

Attached hereto is a marked-up version of the changes made to the specification and claims by the current amendment. The attached page is captioned **"Versions with Markings to Show Change Made."**

In addition, the present amendment cancels original claims 1-13 in favor of new claims 14-26. Claims 14-26 have been presented solely because the revisions by crossing out underlining which would have been necessary in claims 1-13 in order to present those claims in accordance with preferred United States Patent Practice would have been too extensive, and thus would have been too burdensome. The present amendment is intended for clarification purposes only and not for substantial reasons related to patentability pursuant to 35 U.S.C. §§101, 102, 103 or 112. Indeed, the cancellation of claims 1-13 does not constitute an intent on the part of the Applicants to surrender any of the subject matter of claims 1-13.

Early consideration on the merits is respectfully requested.

Respectfully submitted,

BELL, BOYD & LLOYD LLC

BY _____

William E. Vaughan
Reg. No. 39,056
P.O. Box 1135
Chicago, Illinois 60690-1135
Phone: (312) 807-4292

20050-4956.001

VERSION WITH MARKINGS TO SHOW CHANGES MADE

In the Specification:

SPECIFICATION

TITLE OF THE INVENTION

ALTERNATING UPLINK/DOWNLINK TRANSITIONS IN CHANNEL ALLOCATION IN A TDD TRANSMISSION FRAME WITH A NUMBER OF SWITCHING TIMES

~~Description~~

~~Alternating uplink/downlink transitions in channel allocation in a TDD transmission frame with a number of switching times~~

BACKGROUND OF THE INVENTION

The present invention relates to a method for controlling uplink/downlink transitions in channel allocation in a transmission frame, particularly a TDD transmission frame ~~as claimed in the preamble of claim 1~~, and a communications system for carrying out the method.

In radio communications systems, information (for example, voice, image information or other data) are transmitted with the aid of electromagnetic waves via a radio interface between the transmitting and receiving radio station (base station or mobile station, respectively). The electromagnetic waves are radiated at carrier frequencies which are in the frequency band provided for the respective system. In the case of GSM (Global System for Mobile Communication), the carrier frequencies are in the range of 900, 1800 or 1900 MHz, respectively. For future mobile radio networks with CDMA or TD/CDMA transmission methods via the radio interface, for example the UMTS (Universal Mobile Telecommunications system) or other third-generation systems, frequencies in the frequency band of ~~approx.~~ approximately 2000 MHz are provided.

Frequency Division Multiple access (FDMA), Time Division Multiple Access (TDMA) or a method known as Code Division Multiple Access (CDMA) are used for distinguishing between the signal sources and, thus, for evaluating the signals. A particular instance of the time division multiple access is a TDD (Time

Division Duplex) transmission method in which the transmission takes place in a common frequency band separated in time both in the uplink, i.e. from the mobile station to the base station, and in the downlink, i.e. from the base station to the mobile station.

In the TDD system, uplink and downlink time slots are located within one transmission frame. Assuming that only one frequency band (one carrier frequency) is available to an operator, time slot clustering can be introduced in a channel assignment method in order to be able to guarantee the reusability of the channel (i.e., time slot) with a certain spacing. The channel allocation method has the task of distributing the available resources, on the one hand, to the cells (which occurs on a rather slow time axis) and, on the other hand, to allocate one (or more) resource(s) for a particular connection (service). The method proposed in the text which follows is classed as the former, in particular.

For two adjacent cells Z1 and Z2, shown in ~~figure~~ Figure 1, with base stations BS and mobile stations MS, particularly strong interferences are obtained from a mobile station MS which is close by in the adjacent cell, with synchronous alignment of the transmission frames of the adjacent stations or cells for a mobile station MS which receives signals from its associated base station BS. This case, which occurs quite frequently with a homogeneous distribution of the mobile stations, is critical especially at the cell boundaries.

According to ~~figure~~ Figure 2, interferences are obtained for the constellation where the transmit case TX of a mobile station MS overlaps the receive case RX of the other mobile station MS. A switching point SP in each case separates the transmit case TX and the receive case RX. For a frame-by-frame transmission, one frame fr ~~comprising~~ having a number of time slots ts, the duration of the occurrence of interferences depends on the displacement of the beginning of the frame and position of the switching point SP between the two cells Z1, Z2. Strong interferences cause losses in the spectral efficiency of the radio communications system.

In common TDD methods, therefore, there is frame synchronization and no variable switching time but a fixed switching time so that a fixed allocation exists

20050-436.1001

within the communication network (e.g., time slots 0-11 for downlink, 12-23 for uplink).

Frame synchronization alone, however, does not yet lead to optimum results if the requirements for the capacity utilization are different in adjacent cells. In particular, the case is unsolved in which relatively large data volumes are to be transmitted in the uplink in one cell but relatively large data volumes are to be transmitted in the downlink in adjacent cells.

From US 5,719,859, a TDMA radio communications system is known in which a single base station communicates with a multiplicity of mobile stations within its transmitting range. In this arrangement, individual channels of a transmission frame are variably allocated to the mobile stations in dependence on load. Furthermore, it is specified to include within a transmission frame its time slots for uplinks from the beginning of the transmission frame and to include its time slots for downlinks from its end to its beginning. Each time slot is only allocated for a single mobile station and only for a single transmit direction.

An extension of this communications system to a cellular communications system ~~comprising~~ having a multiplicity of adjacent cells is known from WO 98/29988 A1. In this document, it is proposed to group a multiplicity of radio cells and sectors within it in the manner of a cluster. In the arrangement, sectors of two different cells are, in each case, directly adjacent so that a cluster of two is formed. Furthermore, it is specified to subdivide the transmission frames into two subframes, one subframe being expressly used only for either uplinks or downlinks. Furthermore, it is specified to assign the two subframes to the different sectors. Accordingly, it is possible during one frame either only to receive or only to transmit in the sector of each cell independently of the other statements. For the next frame, in consequence, the transmit direction must be reversed for the entire transmission frame.

The resources are assigned in accordance with a similar basic principle as in US 5,719,859, but in this case only a distribution of packet data to these subframes is specified ~~but~~ and not an assignment of channels of a TDD system.

The present invention is ~~based on the object of~~, therefore, directed toward providing an improved method and an improved communications system, particularly a radio communications system, in which the switching points between uplink and downlink transmission times can be selected more variably in adjacent cells.

This object is achieved by the method having the features of claim 1 and the communications system having the features of claim 12. Advantageous further developments can be found in the subclaims.

SUMMARY OF THE INVENTION

In its basic concept, the TDD transmission method can also support asymmetric services in which the transmission capacity in the uplink does not need to be equal to that in the downlink. If this asymmetry is not wanted to the same extent in all radio cells, a critical interference scenario can arise. The considerations relating to the TDD transmission method had failed to recognize the relevant problems of the mutual interferences of a multiplicity of base stations and mobile stations operated within the same frequency band.

A method is proposed here which provides an optimum distribution of the time slots within the transmission frame ~~and particularly~~(particularly, the TDD transmission frame) and at the same time enables the following two criteria to be ~~realized~~ achieved at the same time:

1. Changing uplink/downlink conditions can be taken into consideration by a variable switching point between the uplink and downlink time slots within a cell almost independently of the switching points of the other cells.

2. A changing load distribution in the network can be made possible by extending the access time for a connection in one cell or, in other words, by allocating a different number of channels (time slots) per cell in reuse.

Due to the condition of aligned uplink or downlink direction in adjacent active cells or cell groups, the two criteria do not lead to the problem of ~~cochannel~~ co-channel interference in the form of mutual interference of two mobile stations in directly adjacent cells of different reused clusters, one of which is transmitting exactly on the channel (time slot) on which the other one is receiving at the same

20050-1055.004

time. The same applies to interference between base stations when both are transmitting or receiving on the same time slot.

Using the solution proposed here, the TDD mode can now ~~also~~ be implemented ~~by means of~~ via only one frequency.

The proposed combination of separate switching points per cell (see case a in the text which follows) and of the advantage of an unchanged link direction of the same time slots (see case b in the text which follows) makes it possible that the unwanted MS-MS interferences will not occur both in the case of a change in the uplink/downlink (UL/DL) ratio in the cell and in the case of a load change (different resource distribution over the cells in the cluster). To this end, this method uses a number of switching points (one per cell) with alternating UL/DL change of successive cell-related channel allocations within the transmission frame (see case c).

In clusters of three or four, only the switching points of up to three or four cells or groups of cells need to be correspondingly matched to one another in each case.

~~In the text which follows, exemplary embodiments are explained in greater detail with reference to the drawing, in which:~~

Additional features and advantages of the present invention are described in, and will be apparent from, the following Detailed Description of the Invention and the Figures.

BRIEF DESCRIPTION OF THE FIGURES

Figure 1 shows two cells with one base station and one mobile station each;

Figure 2 shows the case of interference between two adjacent mobile stations, one of which is transmitting and the other one is receiving at the same time;

Figure 3 shows a block diagram of a mobile radio system;

Figure 4 shows a mobile radio system according to a first exemplary embodiment in a macro environment with a cluster of three and the associated transmission frames with a number of switching points;

Figure 5 shows this mobile radio system and its transmission frame with a number of switching points and a different number of time slots per cell with interference,

Figure 6 shows this mobile radio system and its transmission frame with a common switching point and a different number of group time slots per cell,

Figure 7 shows this mobile radio system and its transmission frame with a different switching point in each case per transmission frame and a different number of time slots per cell in an interference situation,

Figure 8 shows this mobile radio system and its transmission frame with a number of switching points with the same link direction of adjacent cells,

Figure 9 shows this radio system and its transmission frame with a number of time-variable switching points with tolerable interference,

Figure 10 shows this mobile radio system and its transmission frame with a number of time-variable switching points and a different number of time slots per cell with tolerable interference,

Figure 11 shows, according to a further exemplary embodiment, a different scenario with microenvironment and a cluster of three with transmission frame,

Figure 12 shows an exemplary scenario with microenvironment and a cluster of two with transmission frame,

Figure 13 shows a mobile radio system with a medium time slot reuse distance of 4 ~~and~~,

Figure 14 shows a block diagram of a control device.

DETAILED DESCRIPTION OF THE INVENTION

As can be seen from ~~figure~~ Figure 3, an exemplary mobile radio communications system consists of a multiplicity of mobile switching centers MSC which are networked together or, respectively, establish access to a fixed network PSTN. Furthermore, these mobile switching centers MSC are connected to, in each case, at least one device RNM for allocating radio engineering resources. Each of these devices RNM, in turn, provides for a connection to at least one base station BS. The term base station in its widest interpretation can ~~also~~ be interpreted only as the site of, for example, a transmitting antenna. Such a base station BS can set up a

20050495 1.DOC

connection to other radio stations~~;~~ e.g.~~,~~ mobile stations MS or other mobile and stationary terminals via a radio interface. Each base station BS forms at least one radio cell Z. In the case of sectorization or with hierarchical cell structures, a number of radio cells Z are also supplied per base station BS~~;~~ e.g.~~,~~ for part-areas around the base station BS.

Figure 3 shows exemplary connections V1, V2, V3 for transmitting user information and signaling information between mobile stations MS1, MS2, MS3, MSn and a base station BS. An operation and maintenance center OMC implements control and maintenance functions for the mobile radio network or parts thereof, respectively. The functions of this structure can be transferred to other communications systems, particularly radio communications systems in which the method below can be used, and particularly for subscriber access networks with wireless subscriber loop.

Figure 4 and the subsequent figures show a mobile radio system with macroenvironment typical of the ideal, and the associated transmission frames from its cells Z. According to the ETSI simulation rules for macro and microenvironment in UMTS 30.03, macroenvironment ~~means that~~ refers to a high mast, which clearly protrudes over the roof edge of houses, ~~is~~ being used for transmitting and receiving. In this connection, N = 16 is assumed to be the number of time slots available in the transmission frame and, furthermore, a cluster of three cell division is provided which will be called cells R (dotted), G (shaded to the right) and B (shaded to the left) in the text which follows. Each cell also has a particular number of uplink and downlink time slots (e.g., $n_u(R)$ is assumed to be the number of uplink time slots per cell R).

In the representation, a first central cluster in the cell mapping is shown dotted, with shading to the left or shading to the right depending on group and with regard to the transmission allocation in the upper diagram for the purpose of illustration. Compared with other clusters surrounding this cluster, this central cluster is surrounded by a frame. Regarding the transmission allocation, the transmission parameter of the other adjacent clusters are shown in the lower diagram in each case. White circles represent the positions of the base stations BS

20050405.1505.001

with sector antennas which, in each case, supply three surrounding cells Z (R, G, B) which are typically shown diagrammatically as hexagons for the purpose of simplification.

However, alternative arrangements are also possible such as, for example, the arrangement of, in each case, a separate base station with an omnidirectional antenna in the center of each individual cell.

The method proposed here is shown in individual stages ~~by means of~~ via the subsequent steps and figures for the purpose of clarity of explanation.

Case a: Figure 4 shows a clustering with a number of switching points, i.e., each cell both in the cluster and in reuse has its own UL/DL switching point. In this arrangement, the switching points can be different within ~~the~~ each ~~cells~~ cell ~~in each of~~ of a group of cells compared with the switching points of the other group members. The number of time slots per cell, however, is still fixed. All cells are allocated the same number of resources. The transmission frames of the adjacent cells of the three groups are suitably controlled synchronously in such a manner that all transmission frames simultaneously begin with time slot 1 for transmitting general information of the base stations to mobile stations in the corresponding cells in the downlink.

Using multiple switching points, i.e. a separate switching point per cell, ensures a situation of minimum interference with changing uplink/downlink relationships. If the switching point is shifted, MS/MS interference will arise between adjacent mobile stations but a minimum distance D is maintained between the mobile stations so that the interference situation is relatively noncritical. As an example, transmission in the fourth channel or time slot will be quoted where a cell of the central group transmits in the downlink but the adjacent cells of this group transmit in the uplink, with a minimum distance D. MS/MS interference between two mobile stations in the same cell groups and with the same transmission channel is thus permissible due to the minimum distance D.

If, however, given this channel allocation strategy, it is intended to take into account an inhomogeneous load distribution which leads to a change in the number of channels, i.e. shift the time slots of a cell with little traffic volume into a cell with

20050704.0957.001

a large traffic volume within the cluster, this minimum distance is no longer given under certain conditions as shown in ~~figure~~ Figure 5. The critical MS/MS interferences will occur here since the number of time slots per cell changes within reuse in such a manner that the MS/MS ~~inteference~~ interference for time slots 7 and 8, i.e. for cells of different groups, exists to its full extent in this case since the minimum distance D is no longer given.

Case b:a channel allocation method according to ~~figure~~ Figure 6 which uses only one switching point, i.e. groups the time slots for uplink and downlink, is better suited with respect to a changing distribution of the time slots to the cells while at the same time ensuring minimum interference. Due to the joint switching of the transmit direction in all cells, there can be no MS/MS interferences. For example, there can be a different distribution of the time slots to the three sectors at each site within one transmit direction in ~~figure~~ Figure 6. It is now possible to violate the minimum reuse distance, e.g., in the downlink between cells of different direction; i.e., a mobile station MS is simultaneously receiving data or signals from two adjacent base stations. For mobile stations close to their base station, this does not represent a problem because the level differences are adequate. The mobile stations located in the center between supplying and interfering base station so that they receive approximately the same signal levels can be allocated undisturbed; i.e., in particular, different time slots in which these collisions cannot occur.

If, in contrast, the switching point changes, it is possible that, in addition to the lacking minimum distance D, the abovementioned MS/MS interference also occurs as shown in ~~figure~~ Figure 7. If the switching point in the reuse cluster changes due to another UL/DL ratio, they will be correspondingly extremely disturbing MS/MS interferences with only one switching point per transmission frame and grouped uplink/downlink time slots.

Case c: if the advantages of the two methods are combined, an allocation arrangement is obtained which has no problematic MS/MS interferences in the case of a change of the UL/DL ratio and changing traffic volumes. This optimized method provides for a number of variable switching points, on the one hand, but also a minimization of the situation that there is simultaneous transmission and

20050040561001

reception, respectively, (MS/MS interference) in the same channel (time slot) in directly adjacent cells. As shown in ~~figure~~ Figure 8, this can be achieved by the fact that the transmit direction does not change in the time slots at the boundary to the next cell in the cluster or preferably in the entire communication network of the environment (as at b). ~~i.e.~~ That is, if, for example, the last time slot belonging to cell G is in the uplink, the first time slot belonging to cell R ~~must~~ also must be in the uplink. There will then not be any UL/DL change at the cell boundaries within the transmission frame. This provides an alternating UL/GL allocation for cell B, DL/UL allocation for cell G and again UL/DL allocation for the next cell in the cluster. Figure 8 thus represents a hybrid method with alternating UL/DL changes for successive cells in the transmission frame.

If then the ratio of uplink/downlink time slots in a cell is changed as is shown in ~~figure~~ Figure 9, there will admittedly be MS/MS interferences but the minimum distance D is maintained; i.e. the situation of having mutually interfering mobile stations in immediate vicinity is avoided. That is to say, in this hybrid method, alternating UL/DL changes are possible for successive cells in the transmission frame, the UL/DL switching point being shifted within the cell.

The second critical application is the allocation of a different number of resources in the different cells due to traffic volumes which differ locally. In this case, shown in ~~figure~~ Figure 10, the minimum distance is admittedly no longer given but MS/MS interference in which the same time slot is used for different transmit directions in the immediate vicinity is avoided, nevertheless. Thus, a hybrid method with alternating UL/DL changes for successive cells in the transmission frame is also possible in which the number of resources per cell is differently distributed in the reuse cluster.

The hybrid method thus provides for combining of the two cases a and b, that is to say a number of switching points (preferably, but not necessarily, only one per cell) with alternating UL/DL changes of successive cell-specific channel allocations within the transmission frame.

As a further exemplary embodiment, another scenario of a cluster of three in a microenvironment as Manhatten grid network with exemplary transmission frame

20050-485101

is shown in ~~figure~~ Figure 11. Microenvironment here ~~means that~~ refers to the transmitting and receiving antennas ~~are~~ being clearly arranged below the roof edges and ~~are~~ being used for supplying streets between blocks of houses. The white lines here represent the streets and the dotted boxes represent blocks of houses. The antennas, which are preferably arranged away from street intersections between two blocks of houses each are used, as a rule, not for supplying the blocks but the streets. The transmission arrangement corresponds to that of ~~figure~~ Figure 10 in this case.

Figure 12 represents a further exemplary Manhatten scenario but here with a cluster of two, and a corresponding transmission frame. The arrangement of base stations within the cells is as in the previous example.

According to a further exemplary embodiment, ~~figure~~ Figure 13 shows another exemplary cell arrangement with a typical instance of cells in a real network with medium reuse of four. In this arrangement, arbitrary cell forms with variable numbers of adjacent cells which, for example, can be supplied with time slots in a medium reuse of four (compare the four-color theorem) are instanced in accordance with the inhomogeneous propagation conditions of real radio environments~~, i.e.~~. That is, in this arrangement, it is assumed that, instead of three groups of cells to be matched to one another, four groups R, G, B, W of cells are formed, the switching points and switching directions, as shown in the transmission frame, can be matched to one another in accordance with the hybrid allocation method from case c.

The base station BS contains a transceiver device TX/RX shown in ~~figure~~ Figure 14, which digital/analog-converts the transmit signals to be radiated, translates them from the baseband into the frequency range of radiation and modulates and amplifies the transmit signals. A signal generating device SA has first assembled the transmit signals into radio blocks and allocated them to the corresponding frequency channel and time slot. A signal processing device DSP evaluates receive signals received via the transceiver device GX/RX and performs a channel estimation.

20050-485P001

For the signal processing, the receive signals are converted into symbols having a discreet set of values; for example, digitized. A signal processing device DSP which contains as digital signal processor, for example, a JD processor for detecting the user information and the signaling information in accordance with the JD (Joint Detection) CDMA method, evaluates the data sections. The interaction of the components and the setting of the switching point SP is controlled by a control device SE of the base station BS. Associated data on the switching point SP and the actual situations of the link are temporarily stored in a memory device MEM.

The mobile station MS contains, correspondingly adapted, the modules explained for the base station BS and additionally an operating panel T. At the operating panel T, the subscriber can make inputs, among other things an input for activating the mobile station MS or for setting up a connection to the base station BS.

The control device SE evaluates signals sent in the downlink and received by the mobile station MS and signals sent from the mobile station to the base station and determines the requirement for data to be transmitted in the DL and in the UL. The channels to be used and the switching points are established in accordance with the requirement. These data are preferably transmitted to the communicating device. Furthermore, the channels and switching points to be allocated are matched to the base stations of the adjacent cells. In an exemplary control method, a coarse pregrouping of the resources is first carried out on a slow time axis for a cluster of three. The number of time slots remaining after the BCCH time slot is advantageously divided by three and assigned to the individual cell groups. This coarse grouping can also be different if there is a corresponding requirement.

After that, a repeated determination is made on a faster time axis, i.e. in short time intervals, for checking current requirements, what allocation requirements exist for a cell and its adjacent cells. The resources are then correspondingly allocated and required switching points established for these cells; i.e., the original resources of adjacent cells are allocated for a first cell and/or the time slot is shifted for the switching.

Alignment ~~by means of~~ via the adjacent base stations themselves would be associated with a very high and frequent exchange of data among them. A central control of the resources and channel allocations and switching points for a multiplicity of base stations by, for example, the devices RNM for allocating radio engineering resources or the mobile switching centers MSC to which the current load conditions and resource requirements are in each case transmitted by the base stations BS_2 is, therefore, simpler.

In the extreme case, control ~~could~~ also could be handled by the mobile stations but is then disadvantageously expensive.

Precontrol of the switching points and signaling to the communicating stations can take place, for example, via the BCCH (Broadcast Control Channel) in the downlink.

Although the present invention has been described with reference to specific embodiments, those of skill in the art with recognize that changes may be made thereto without departing from the spirit and scope of the invention as set forth in the hereafter appended claims.

~~Abstract~~

~~Alternating uplink/downlink transitions in channel allocation in a TDD transmission frame having a number of switching points~~

ABSTRACT OF THE DISCLOSURE

~~The invention relates to a~~ A method for controlling uplink/downlink transitions in channel allocation in a transmission frame for information transmission in a communications system ~~comprising~~ having a multiplicity of cells, in which a switching point between uplink and downlink ~~(UL/DL)~~ transitions is controlled in alignment with the respective switching point of adjacent cells~~;~~ in such a manner that the same uplinks and downlinks are predetermined in directly adjacent cells.

A load-dependent control of the uplink and downlink within individual adjacent cells or groups of cells becomes possible ~~by means of~~ via a variable activation of possibly a number of switching points and/or resources of the individual cells which are switched to be active. The cells are preferably arranged for this purpose in a cluster of three or four arrangement, a number of time-variable switching points (one each per cell) being used with alternating uplink and downlink change of successive cell-related channel allocations within the transmission frame.

~~Figure 10~~

20050048507

Fig. 1


Z1
MS
BS
MS
BS
Z2

Fig. 2

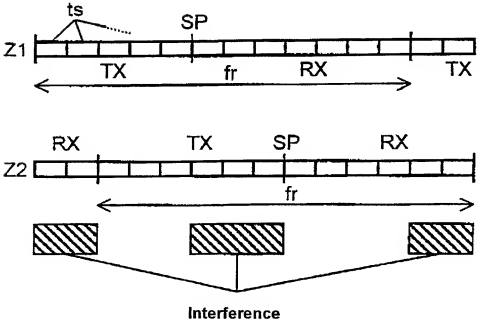
ts
SP
Z1
TX
fr
RX
TX
RX
TX
SP
RX
Z2
fr
Interference

Fig. 3

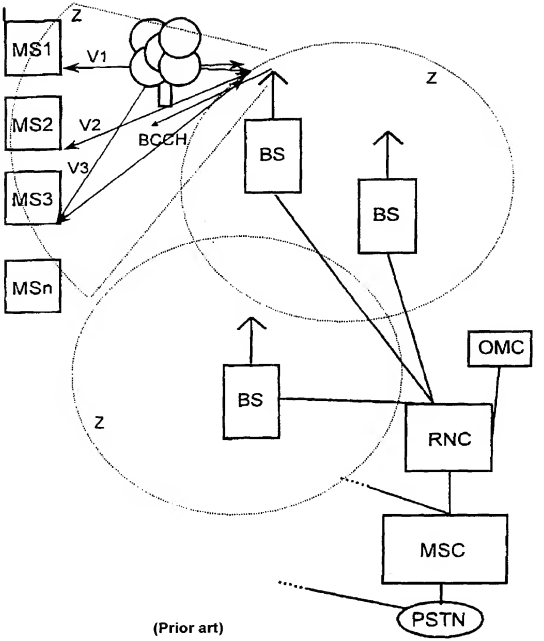

(Prior art)

Fig. 4

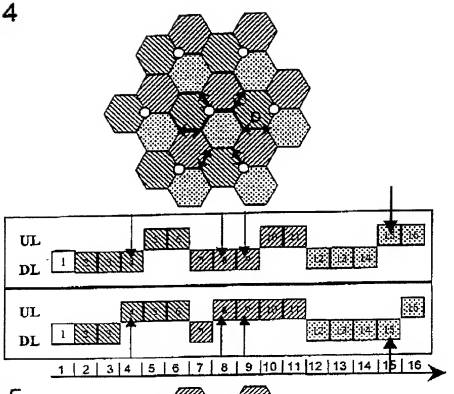

Fig. 5

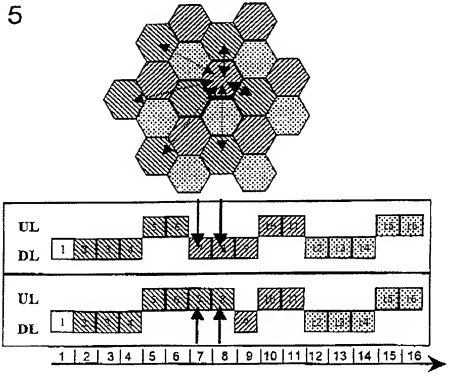

20050-4551001

Fig. 12

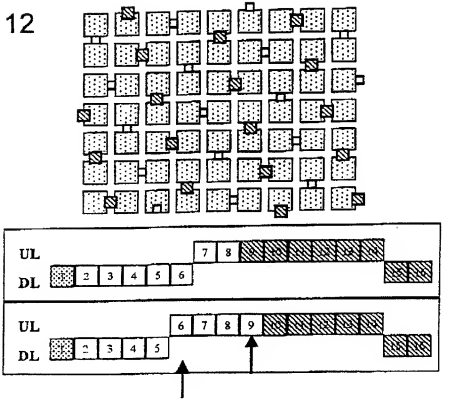

20050048561001

Fig. 13

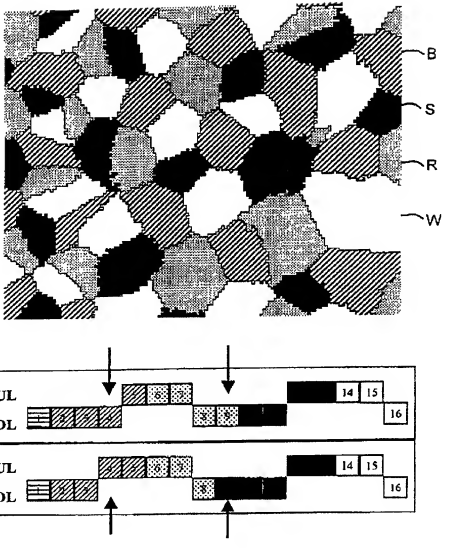

20050-4551001

Fig. 14

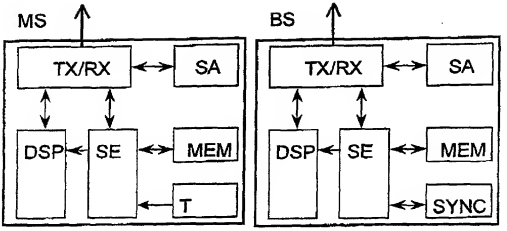

20050-1856100P

9/PRTS
10/019584
531 Rec'd PCT/ 21 DEC 2001

10019584 "20050 RECD

Description

Alternating uplink/downlink transitions in channel allocation in a TDD transmission frame with a number of switching times

The invention relates to a method for controlling uplink/downlink transitions in channel allocation in a transmission frame, particularly a TDD transmission frame as claimed in the preamble of claim 1 and a communications system for carrying out the method.

In radio communications systems, information (for example voice, image information or other data) are transmitted with the aid of electromagnetic waves via a radio interface between the transmitting and receiving radio station (base station or mobile station, respectively). The electromagnetic waves are radiated at carrier frequencies which are in the frequency band provided for the respective system. In the case of GSM (Global System for Mobile Communication), the carrier frequencies are in the range of 900, 1800 or 1900 MHz, respectively. For future mobile radio networks with CDMA or TD/CDMA transmission methods via the radio interface, for example the UMTS (Universal Mobile Telecommunications system) or other third-generation systems, frequencies in the frequency band of approx. 2000 MHz are provided.

Frequency Division Multiple access (FDMA), Time Division Multiple Access (TDMA) or a method known as Code Division Multiple Access (CDMA) are used for distinguishing between the signal sources and thus for evaluating the signals. A particular instance of the time division multiple access is a TDD (Time Division Duplex) transmission method in which the transmission

takes place in a common frequency band separated in time both in the uplink, i.e. from the mobile station to the base station, and in the

20050-4856 DOT

downlink, i.e. from the base station to the mobile station.

In the TDD system, uplink and downlink time slots are located within one transmission frame. Assuming that only one frequency band (one carrier frequency) is available to an operator, time slot clustering can be introduced in a channel assignment method in order to be able to guarantee the reusability of the channel (i.e. time slot) with a certain spacing. The channel allocation method has the task of distributing the available resources, on the one hand, to the cells (which occurs on a rather slow time axis) and, on the other hand, to allocate one (or more) resource(s) for a particular connection (service). The method proposed in the text which follows is classed as the former in particular.

For two adjacent cells Z1 and Z2, shown in figure 1, with base stations BS and mobile stations MS, particularly strong interferences are obtained from a mobile station MS which is close by in the adjacent cell, with synchronous alignment of the transmission frames of the adjacent stations or cells for a mobile station MS which receives signals from its associated base station BS. This case, which occurs quite frequently with a homogeneous distribution of the mobile stations is critical especially at the cell boundaries.

According to figure 2, interferences are obtained for the constellation where the transmit case TX of a mobile station MS overlaps the receive case RX of the other mobile station MS. A switching point SP in each case separates the transmit case TX and the receive case RX. For a frame-by-frame transmission, one frame fr comprising a number of time slots ts, the duration of the occurrence of interferences depends on the

20050-19501 DE

displacement of the beginning of the frame and position of the switching point SP between the two cells Z1, Z2. Strong interferences

20050407.050014

cause losses in the spectral efficiency of the radio communications system.

In common TDD methods, therefore, there is frame synchronization and no variable switching point but a fixed switching point so that a fixed allocation exists within the communication network (e.g. time slots 0-11 for downlink, 12-23 for uplink).

Frame synchronization alone, however, does not yet lead to optimum results if the requirements for the capacity utilization are different in adjacent cells. In particular, the case is unsolved in which relatively large data volumes are to be transmitted in the uplink in one cell but relatively large data volumes are to be transmitted in the downlink in adjacent cells.

The invention is based on the object of providing an improved method and an improved communications system, particularly radio communications system, in which the switching points between uplink and downlink transmission times can be selected more variably in adjacent cells.

This object is achieved by the method having the features of claim 1 and the communications system having the features of claim 12. Advantageous further developments can be found in the subclaims.

In its basic concept, the TDD transmission method can also support asymmetric services in which the transmission capacity in the uplink does not need to be equal to that in the downlink. If this asymmetry is not wanted to the same extent in all radio cells, a critical interference scenario can arise. Previous considerations relating to the TDD transmission method

20050714T050

had failed to recognize the relevant problems of the mutual interferences of a

20050404.0157.01

multiplicity of base stations and mobile stations operated within the same frequency band.

A method is proposed here which provides an optimum distribution of the time slots within the transmission frame and particularly the TDD transmission frame and at the same time enables the following two criteria to be realized at the same time:

1. Changing uplink/downlink conditions can be taken into consideration by a variable switching point between the uplink and downlink time slots within a cell almost independently of the switching points of the other cells.

2. A changing load distribution in the network can be made possible by extending the access time for a connection in one cell or, in other words, by allocating a different number of channels (time slots) per cell in reuse.

Due to the condition of aligned uplink or downlink direction in adjacent active cells or cell groups, the two criteria do not lead to the problem of cochannel interference in the form of mutual interference of two mobile stations in directly adjacent cells of different reused clusters, one of which is transmitting exactly on the channel (time slot) on which the other one is receiving at the same time. The same applies to interference between base stations when both are transmitting or receiving on the same time slot.

Using the solution proposed here, the TDD mode can now also be implemented by means of only one frequency.

The proposed combination of separate switching points per cell (see case a in the text which follows) and of the advantage of

20050715T084004Z

an unchanged link direction of the same time slots (see case b in the text which follows) makes it possible that the unwanted MS-MS interferences will not occur both in the case of a change in the uplink/downlink (UL/DL) ratio in the cell and in the case of a load change (different resource distribution over the cells in the cluster). To this end, this method uses a number of switching points (one per cell) with alternating UL/DL change of successive cell-related channel allocations within the transmission frame (see case c).

In clusters of three or four, only the switching points of up to three or four cells or groups of cells need to be correspondingly matched to one another in each case.

In the text which follows, exemplary embodiments are explained in greater detail with reference to the drawing, in which:

Figure 1 shows two cells with one base station and one mobile station each,

Figure 2 shows the case of interference between two adjacent mobile stations, one of which is transmitting and the other one is receiving at the same time,

Figure 3 shows a block diagram of a mobile radio system,

Figure 4 shows a mobile radio system according to a first exemplary embodiment in a macro environment with a cluster of three and the associated transmission frames with a number of switching points,

Figure 5 shows this mobile radio system and its transmission frame with a number of switching points and different number of time slots per cell with interference,

20050401.050401

Figure 6 shows this mobile radio system and its transmission frame with a common switching point and a different number of group time slots per cell,

Figure 7 shows this mobile radio system and its transmission frame with a different switching

20050-4055.001

point in each case per transmission frame and a different number of time slots per cell in an interference situation,

Figure 8 shows this mobile radio system and its transmission frame with a number of switching points with the same link direction of adjacent cells,

Figure 9 shows this radio system and its transmission frame with a number of time-variable switching points with tolerable interference,

Figure 10 shows this mobile radio system and its transmission frame with a number of time-variable switching points and a different number of time slots per cell with tolerable interference,

Figure 11 shows, according to a further exemplary embodiment, a different scenario with microenvironment and a cluster of three with transmission frame,

Figure 12 shows an exemplary scenario with microenvironment and a cluster of two with transmission frame,

Figure 13 shows a mobile radio system with a medium time slot reuse distance of 4 and

Figure 14 shows a block diagram of a control device.

As can be seen from figure 3, an exemplary mobile radio communications system consists of a multiplicity of mobile switching centers MSC which are networked together or, respectively, establish access to a fixed network PSTN. Furthermore, these mobile switching centers MSC are connected to in each case at least one device RNM for allocating radio engineering resources. Each of these devices RNM, in turn, provides for a connection to at least one base station BS. The term base station in its widest interpretation can also be

20050-1956.pdf

interpreted only as the site of, for example a transmitting antenna. Such a base station BS can set up a connection to other radio stations, e.g. mobile stations MS or other mobile and stationary terminals via a radio interface. Each base station BS forms at least one radio cell Z. In the case of sectorization or with hierarchical cell structures, a number of radio cells Z are also supplied

20050405T050001

per base station BS, e.g. for part-areas around the base station BS.

Figure 3 shows exemplary connections V1, V2, V3 for transmitting user information and signaling information between mobile stations MS1, MS2, MS3, MSn and a base station BS. An operation and maintenance center OMC implements control and maintenance functions for the mobile radio network or parts thereof, respectively. The functions of this structure can be transferred to other communications systems, particularly radio communications systems in which the method below can be used, particularly for subscriber access networks with wireless subscriber loop.

Figure 4 and the subsequent figures show a mobile radio system with macroenvironment typical of the ideal, and the associated transmission frames from its cells Z. According to the ETSI simulation rules for macro and microenvironment in UMTS 30.03, macroenvironment means that a high mast, which clearly protrudes over the roof edge of houses, is used for transmitting and receiving. In this connection, N = 16 is assumed to be the number of time slots available in the transmission frame and furthermore, a cluster of three cell division is provided which will be called cells R (dotted), G (shaded to the right) and B (shaded to the left) in the text which follows. Each cell also has a particular number of uplink and downlink time slots (e.g. $n_u(R)$ is assumed to be the number of uplink time slots per cell R).

In the representation, a first central cluster in the cell mapping is shown dotted, with shading to the left or shading to the right depending on group and with regard to the transmission allocation in the upper

20050404.1350T01

diagram for the purpose of illustration. Compared with other clusters surrounding this cluster, this central cluster is surrounded by a frame. Regarding the transmission allocation, the transmission parameters

20050405.0934

of the other adjacent clusters are shown in the lower diagram in each case. White circles represent the positions of the base stations BS with sector antennas which in each case supply three surrounding cells Z (R, G, B) which are typically shown diagrammatically as hexagons for the purpose of simplification.

However, alternative arrangements are also possible such as, for example, the arrangement of in each case a separate base station with an omnidirectional antenna in the center of each individual cell.

The method proposed here is shown in individual stages by means of the subsequent steps and figures for the purpose of clarity of explanation.

Case a: Figure 4 shows a clustering with a number of switching points, i.e. each cell both in the cluster and in reuse has its own UL/DL switching point. In this arrangement, the switching points can be different within the cells of in each of a group of cells compared with the switching points of the other group members. The number of time slots per cell, however, is still fixed. All cells are allocated the same number of resources. The transmission frames of the adjacent cells of the three groups are suitably controlled synchronously in such a manner that all transmission frames simultaneously begin with time slot 1 for transmitting general information of the base stations to mobile stations in the corresponding cells in the downlink.

Using multiple switching points, i.e. a separate switching point per cell, ensures a situation of minimum interference with changing uplink/downlink relationships. If the switching point is shifted, MS/MS interference will arise between adjacent mobile stations but a minimum

20040504.0950

distance D is maintained between the mobile stations so that the interference situation is relatively noncritical. As an example, transmission in the fourth channel or time slot will be quoted where a cell of the central group transmits in the downlink but the adjacent cells of this group transmit in the uplink, with a minimum distance D. MS/MS interference between two mobile stations in the same cell groups and with the same transmission channel is thus permissible due to the minimum distance D.

If, however, given this channel allocation strategy, it is intended to take into account an inhomogeneous load distribution which leads to a change in the number of channels, i.e. shift the time slots of a cell with little traffic volume into a cell with a large traffic volume within the cluster, this minimum distance is no longer given under certain conditions as shown in figure 5. The critical MS/MS interferences will occur here since the number of time slots per cell changes within reuse in such a manner that the MS/MS inteference for time slots 7 and 8, i.e. for cells of different groups, exists to its full extent in this case since the minimum distance D is no longer given.

Case b: a channel allocation method according to figure 6 which uses only one switching point, i.e. groups the time slots for uplink and downlink, is better suited with respect to a changing distribution of the time slots to the cells while at the same time ensuring minimum interference. Due to the joint switching of the transmit direction in all cells, there can be no MS/MS interferences. For example, there can be a different distribution of the time slots to the three sectors at each site within one transmit direction in figure 6. It is now possible to violate the minimum reuse distance

20050401 DE 19950484 A1

e.g. in the downlink between cells of different direction, i.e. a mobile station MS is simultaneously receiving data or signals from two adjacent base stations. For mobile stations close to their

20050504.055502

base station, this does not represent a problem because the level differences are adequate. The mobile stations located in the center between supplying and interfering base station so that they receive approximately the same signal levels can be allocated undisturbed, i.e. in particular, different time slots in which these collisions cannot occur.

If, in contrast, the switching point changes, it is possible that, in addition to the lacking minimum distance D, the abovementioned MS/MS interference also occurs as shown in figure 7. If the switching point in the reuse cluster changes due to another UL/DL ratio, they will be correspondingly extremely disturbing MS/MS interferences with only one switching point per transmission frame and grouped uplink/downlink time slots.

Case c: if the advantages of the two methods are combined, an allocation arrangement is obtained which has no problematic MS/MS interferences in the case of a change of the UL/DL ratio and changing traffic volumes. This optimized method provides for a number of variable switching points, on the one hand, but also a minimization of the situation that there is simultaneous transmission and reception, respectively (MS/MS interference) in the same channel (time slot) in directly adjacent cells. As shown in figure 8, this can be achieved by the fact that the transmit direction does not change in the time slots at the boundary to the next cell in the cluster or preferably in the entire communication network of the environment (as at b). i.e., if, for example, the last time slot belonging to cell G is in the uplink, the first time slot belonging to cell R must also be in the uplink. There will then not be any UL/DL change at the cell

20050104.1456.007

boundaries within the transmission frame. This provides an alternating UL/GL allocation for cell B, DL/UL allocation for cell G and again UL/DL allocation for the next cell in the cluster. Figure 8 thus represents

20050504-0958h-0014DE

a hybrid method with alternating UL/DL changes for successive cells in the transmission frame.

If then the ratio of uplink/downlink time slots in a cell is changed as is shown in figure 9, there will admittedly be MS/MS interferences but the minimum distance D is maintained, i.e. the situation of having mutually interfering mobile stations in immediate vicinity is avoided. That is to say, in this hybrid method, alternating UL/DL changes are possible for successive cells in the transmission frame, the UL/DL switching point being shifted within the cell.

The second critical application is the allocation of a different number of resources in the different cells due to traffic volumes which differ locally. In this case, shown in figure 10, the minimum distance is admittedly no longer given but MS/MS interference in which the same time slot is used for different transmit directions in the immediate vicinity is avoided, nevertheless. Thus, a hybrid method with alternating UL/DL changes for successive cells in the transmission frame is also possible in which the number of resources per cell is differently distributed in the reuse cluster.

The hybrid method thus provides for combining of the two cases a and b, that is to say a number of switching points (preferably but not necessarily only one per cell) with alternating UL/DL changes of successive cell-specific channel allocations within the transmission frame.

As a further exemplary embodiment, another scenario of a cluster of three in a microenvironment as Manhatten grid network with exemplary transmission frame is shown in figure 11. Microenvironment here means that the

20050405.1305.1004

transmitting and receiving antennas are clearly arranged below the roof edges and are used for supplying streets between blocks of houses. The white lines here represent the streets and the dotted boxes represent blocks of houses. The antennas, which are preferably arranged away from street intersections between two blocks of houses each are used, as a rule, not for supplying the blocks but the streets. The transmission arrangement corresponds to that of figure 10 in this case.

Figure 12 represents a further exemplary Manhatten scenario but here with a cluster of two, and a corresponding transmission frame. The arrangement of base stations within the cells is as in the previous example.

According to a further exemplary embodiment, figure 13 shows another exemplary cell arrangement with a typical instance of cells in a real network with medium reuse of four. In this arrangement, arbitrary cell forms with variable numbers of adjacent cells which, for example, can be supplied with time slots in a medium reuse of four (compare the four-color theorem) are instanced in accordance with the inhomogeneous propagation conditions of real radio environments, i.e. in this arrangement, it is assumed that, instead of three groups of cells to be matched to one another, four groups R, G, B, W of cells are formed, the switching points and switching directions, as shown in the transmission frame, can be matched to one another in accordance with the hybrid allocation method from case c.

The base station BS contains a transceiver device TX/RX shown in figure 14, which digital/analog-converts the transmit signals to be radiated, translates them from the baseband into the frequency range of radiation and modulates and amplifies the transmit signals. A signal

20050-0957H-1001

generating device SA has first assembled the transmit signals into radio blocks and allocated them to the corresponding frequency channel and time slot. A signal processing device DSP evaluates

20050-10501.DOC

receive signals received via the transceiver device GX/RX and performs a channel estimation.

For the signal processing, the receive signals are converted into symbols having a discreet set of values, for example digitized. A signal processing device DSP which contains as digital signal processor, for example, a JD processor for detecting the user information and the signaling information in accordance with the JD (Joint Detection) CDMA method, evaluates the data sections. The interaction of the components and the setting of the switching point SP is controlled by a control device SE of the base station BS. Associated data on the switching point SP and the actual situations of the link are temporarily stored in a memory device MEM.

The mobile station MS contains, correspondingly adapted, the modules explained for the base station BS and additionally an operating panel T. At the operating panel T, the subscriber can make inputs, among other things an input for activating the mobile station MS or for setting up a connection to the base station BS.

The control device SE evaluates signals sent in the downlink and received by the mobile station MS and signals sent from the mobile station to the base station and determines the requirement for data to be transmitted in the DL and in the UL. The channels to be used and the switching points are established in accordance with the requirement. These data are preferably transmitted to the communicating device. Furthermore, the channels and switching points to be allocated are matched to the base stations of the adjacent cells.

20050+25570+200

In an exemplary control method, a coarse pregrouping of the resources is first carried out on a slow time axis for a cluster of three. The number

20050-4550 DE001

of time slots remaining after the BCCH time slot is advantageously divided by three and assigned to the individual cell groups. This coarse grouping can also be different if there is a corresponding requirement.

After that, a repeated determination is made on a faster time axis, i.e. in short time intervals, for checking current requirements, what allocation requirements exist for a cell and its adjacent cells. The resources are then correspondingly allocated and required switching points established for these cells, i.e. the original resources of adjacent cells are allocated for a first cell and/or the time slot is shifted for the switching.

Alignment by means of the adjacent base stations themselves would be associated with a very high and frequent exchange of data among them. A central control of the resources and channel allocations and switching points for a multiplicity of base stations by, for example the devices RNM for allocating radio engineering resources or the mobile switching centers MSC to which the current load conditions and resource requirements are in each case transmitted by the base stations BS, is, therefore, simpler.

In the extreme case, control could also be handled by the mobile stations but is then disadvantageously expensive.

Precontrol of the switching points and signaling to the communicating stations can take place, for example, via the BCCH (Broadcast Control Channel) in the downlink.

20050401.0550401

Patent claims

1. A method for controlling uplink/downlink transitions in channel allocation in a transmission frame for information transmission in a communications system comprising a multiplicity of cells (Z), in which a switching point (SP) between uplink/downlink (UL/DL) transitions is controlled in alignment with the respective switching point (SP) of adjacent cells in such a manner that the same uplinks or downlinks are predetermined in directly adjacent cells (Z), characterized in that
- switching points (SP) and/or resource allocations are controlled variably within individual adjacent cells (Z) or groups (R, G, B) of cells (Z) which are switched to be active and/or communicate actively.

2. The method as claimed in claim 1, in which switching points (SP) are located between individual time slots of a TDD transmission frame (fr).

3. The method as claimed in claim 1 or 2, in which switching points (SP) within a cell (Z) or group (R, G, B) of cells (Z) are controlled in dependence on changing load distributions in the cell (Z) or group of cells (Z) and/or in the communication network, particularly a different number of channels per cell (Z) or cell group (R, G, B) is allocated.

4. The method as claimed in one of the preceding claims, in which a number of switching points (SP) within a group (R, G, B) of cells (Z) are

20050404.0150

controlled independently in time and variably by the switching points (SP) of the adjacent cells or groups of cells.

20050804.0550.1400

5. The method as claimed in one of the preceding claims, in which the cells (Z) or the group (R, G, B) of cells (Z) are arranged in a cluster of three arrangement (R, G, B).

6. The method as claimed in claim 5, in which the switching points (SP) within a cell (Z) or a group (R, G, B) of cells (Z) are matched to up to one or two active groups of adjacent cells (Z).

7. The method as claimed in one of claims 1 to 4, in which the cells (Z) or the group of cells (Z) are arranged in a cluster of four arrangement (R, G, B, W).

8. The method as claimed in claim 7, in which the switching points (SP) within a cell (Z) or a group of cells (Z) are matched to up to three groups of active adjacent cells (Z).

9. The method as claimed in one of claims 1 to 4, in which the cells (Z) or the group of cells (Z) are arranged in a cluster of two arrangement.

10. The method as claimed in claim 9, in which the switching points (SP) within a cell (Z) or a group of cells (Z) are matched to only one other group of active adjacent cells (Z).

11. The method as claimed in one of the preceding claims, in which a number of time-variable switching points (SP), particularly one each per cell (Z) with alternating uplink/downlink change, are controlled by successive cell-related channel allocations within a transmission frame in such a manner that the direction of connection of active and directly adjacent cells (Z) is in each case

20050519.1505.19505.P.DE.new

the same.

20050404.0458.1

12. A communications system, particularly a radio communications system for carrying out the method as claimed in one of the preceding claims.

13. The communications system as claimed in claim 12, in which circuits are provided in base stations (BS), in mobile stations (MS) in devices (RNM) for allocating radio engineering resources and/or in mobile switching centers (MSC) for controlling the switching points (SP) for a multiplicity of cells (Z).

14. The communications system as claimed in claim 12 or 13, in which antennas with a restricted directional pattern are arranged in base stations for avoiding weak interferences.

20050164501

Abstract

Alternating uplink/downlink transitions in channel allocation in a TDD transmission frame having a number of switching points

The invention relates to a method for controlling uplink/downlink transitions in channel allocation in a transmission frame for information transmission in a communications system comprising a multiplicity of cells, in which a switching point between uplink and downlink (UL/DL) transitions is controlled in alignment with the respective switching point of adjacent cells, in such a manner that the same uplinks and downlinks are predetermined in directly adjacent cells.

A load-dependent control of the uplink and downlink within individual adjacent cells or groups of cells becomes possible by means of a variable activation of possibly a number of switching points and/or resources of the individual cells which are switched to be active. The cells are preferably arranged for this purpose in a cluster of three or four arrangement, a number of time-variable switching points (one each per cell) being used with alternating uplink and downlink change of successive cell-related channel allocations within the transmission frame.

Figure 10

20050-4850-1001

Fig. 1



Fig. 2

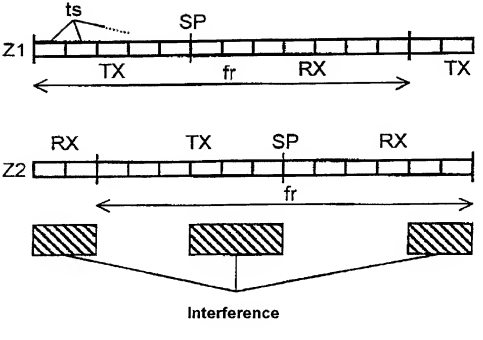

20050"48561001

Fig. 3

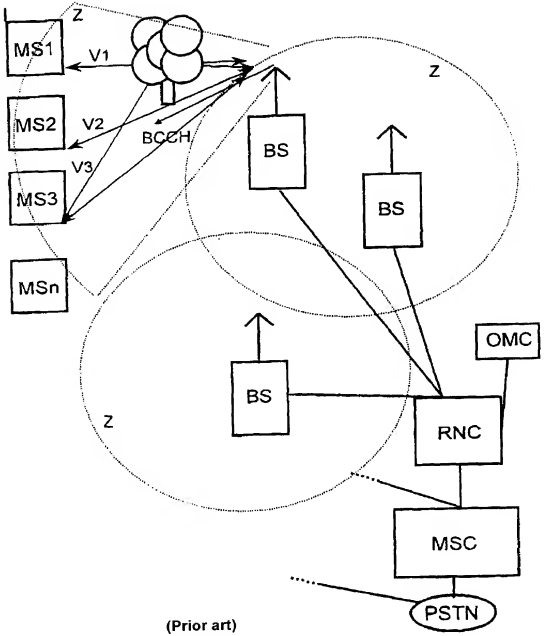

(Prior art)

Fig. 4

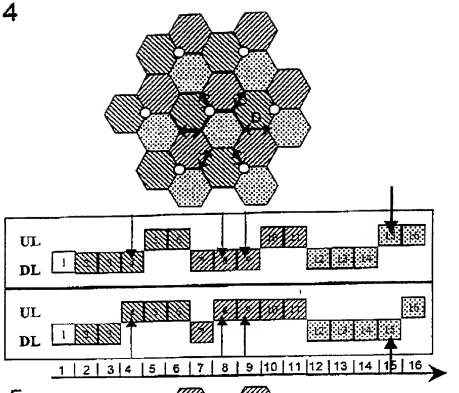

Fig. 5

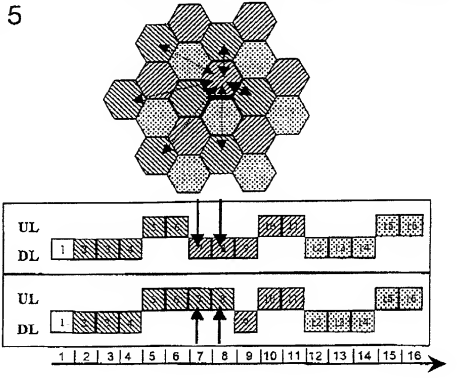

10019584 - 020502

Fig. 6

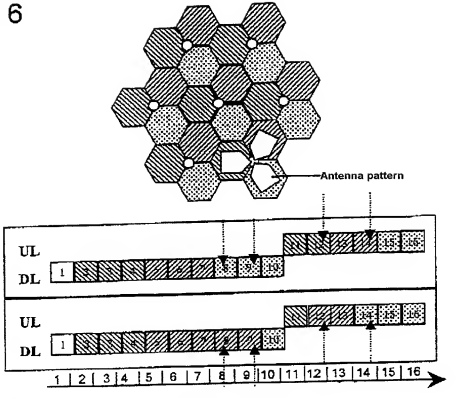

Fig. 7

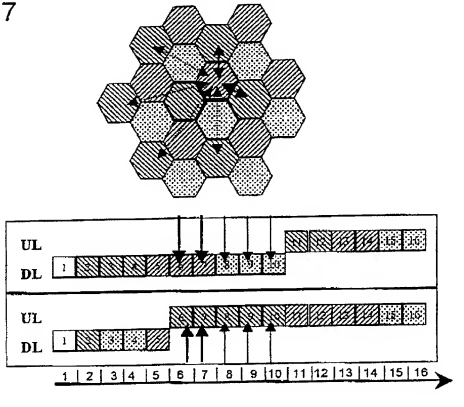

20050-0856100T

Fig. 8

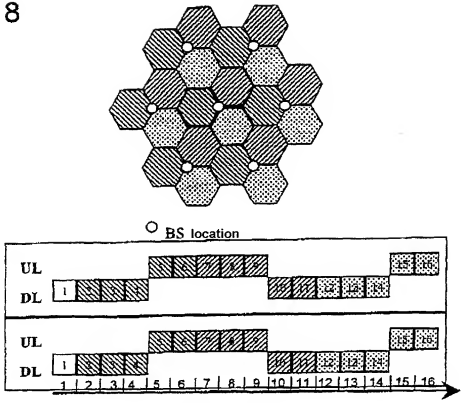

Fig. 9

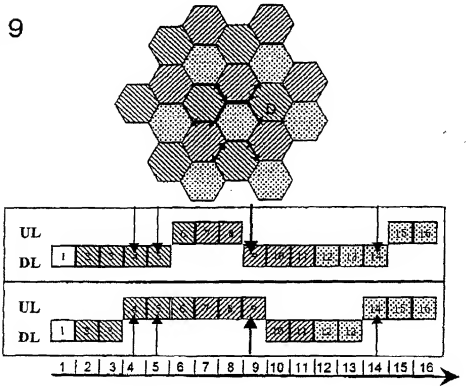

20050-4825-050902

Fig. 10

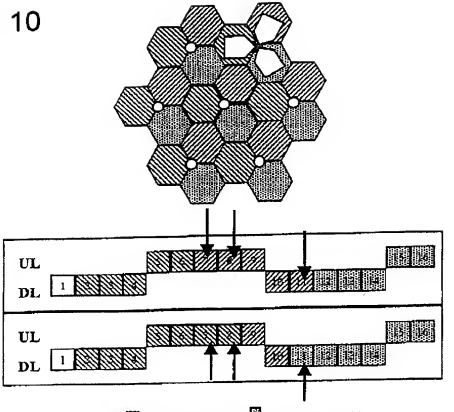

Fig. 11

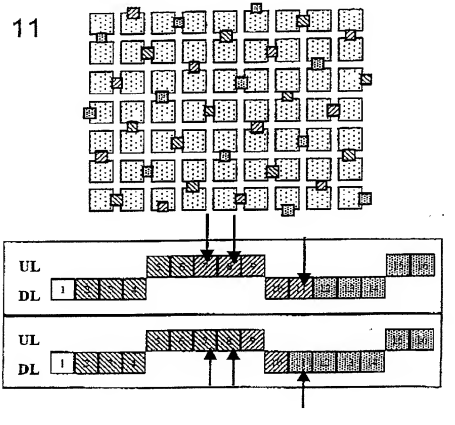

10019584-050502

Fig. 12

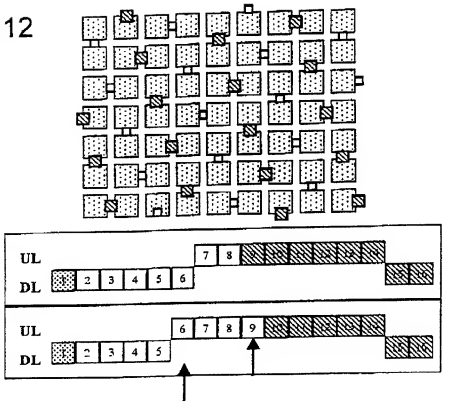

20050048510DT

Fig. 13

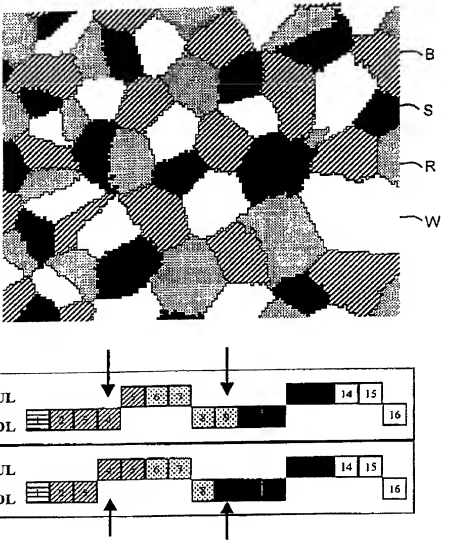

20050-485T001

Fig. 14

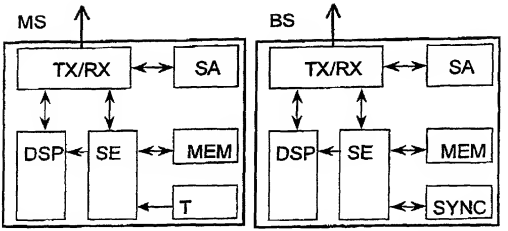

20050902+US2004/001458

Declaration and Power of Attorney For Patent Application
Erklärung Für Patentanmeldungen Mit Vollmacht
German Language Declaration

Als nachstehend benannter Erfinder erkläre ich hiermit an Eides Statt:

As a below named inventor, I hereby declare that:

dass mein Wohnsitz, meine Postanschrift, und meine Staatsangehörigkeit den im Nachstehenden nach meinem Namen aufgeführten Angaben entsprechen,

My residence, post office address and citizenship are as stated below next to my name,

dass ich, nach bestem Wissen der ursprüngliche, erste und alleinige Erfinder (falls nachstehend nur ein Name angegeben ist) oder ein ursprünglicher, erster und Miterfinder (falls nachstehend mehrere Namen aufgeführt sind) des Gegenstandes bin, für den dieser Antrag gestellt wird und für den ein Patent beantragt wird für die Erfindung mit dem Titel:

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

Alternierende Aufwärtsverbindungs/Abwärtsverbindungs-Übergänge bei der Kanalzuteilung in einem TDD-Übertragungsrahmen mit mehreren Schaltzeitpunkten

Alternating upwards link/downwards link transitions in the channel allocation in a TDD-transmission frame with several switching instants

deren Beschreibung

the specification of which

(zutreffendes ankreuzen)
☐ hier beigefügt ist.
☒ am 21.06.2000 als
PCT internationale Anmeldung
PCT Anmeldungsnummer PCT/DE00/02019
eingereicht wurde und am _____
abgeändert wurde (falls tatsächlich abgeändert).

(check one)
☐ is attached hereto.
☒ was filed on 21.06.2000 as
PCT international application
PCT Application No. PCT/DE00/02019
and was amended on _____
(if applicable)

Ich bestätige hiermit, dass ich den Inhalt der obigen Patentanmeldung einschliesslich der Ansprüche durchgesehen und verstanden habe, die eventuell durch einen Zusatzantrag wie oben erwähnt abgeändert wurde.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended by any amendment referred to above.

Ich erkenne meine Pflicht zur Offenbarung irgendwelcher Informationen, die für die Prüfung der vorliegenden Anmeldung in Einklang mit Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) von Wichtigkeit sind, an.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

Ich beanspruche hiermit ausländische Prioritätsvorteile gemäss Abschnitt 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 119 aller unten angegebenen Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde, und habe auch alle Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde nachstehend gekennzeichnet, die ein Anmeldedatum haben, das vor dem Anmeldedatum der Anmeldung liegt, für die Priorität beansprucht wird.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

20150501-1850700
IDNR: 2590 / V: 99-1.00 / B:Val

German Language Declaration

Prior foreign applications
Priorität beansprucht

			Priority Claimed	
19928579.9	DE	22.06.1999	☒	☐
(Number) (Nummer)	(Country) (Land)	(Day Month Year Filed) (Tag Monat Jahr eingereicht)	Yes Ja	No Nein
			☐	☐
(Number) (Nummer)	(Country) (Land)	(Day Month Year Filed) (Tag Monat Jahr eingereicht)	Yes Ja	No Nein
			☐	☐
(Number) (Nummer)	(Country) (Land)	(Day Month Year Filed) (Tag Monat Jahr eingereicht)	Yes Ja	No Nein

Ich beanspruche hiermit gemäss Absatz 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 120, den Vorzug aller unten aufgeführten Anmeldungen und falls der Gegenstand aus jedem Anspruch dieser Anmeldung nicht in einer früheren amerikanischen Patentanmeldung laut dem ersten Paragraphen des Absatzes 35 der Zivilprozeßordnung der Vereinigten Staaten, Paragraph 122 offenbart ist, erkenne ich gemäss Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) meine Pflicht zur Offenbarung von Informationen an, die zwischen dem Anmeldedatum der früheren Anmeldung und dem nationalen oder PCT internationalen Anmeldedatum dieser Anmeldung bekannt geworden sind.

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §122, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occured between the filing date of the prior application and the national or PCT international filing date of this application.

PCT/DE00/02019	21.06.2000	anhängig	pending
(Application Serial No.) (Anmeldeseriennummer)	(Filing Date D, M, Y) (Anmeldedatum T, M, J)	(Status) (patentiert, anhängig, aufgegeben)	(Status) (patented, pending, abandoned)
(Application Serial No.) (Anmeldeseriennummer)	(Filing Date D,M,Y) (Anmeldedatum T, M; J)	(Status) (patentiert, anhängig, aufgeben)	(Status) (patented, pending, abandoned)

Ich erkläre hiermit, dass alle von mir in der vorliegenden Erklärung gemachten Angaben nach meinem besten Wissen und Gewissen der vollen Wahrheit entsprechen, und dass ich diese eidesstattliche Erklärung in Kenntnis dessen abgebe, dass wissentlich und vorsätzlich falsche Angaben gemäss Paragraph 1001, Absatz 18 der Zivilprozessordnung der Vereinigten Staaten von Amerika mit Geldstrafe belegt und/oder Gefängnis bestraft werden koennen, und dass derartig wissentlich und vorsätzlich falsche Angaben die Gültigkeit der vorliegenden Patentanmeldung oder eines darauf erteilten Patentes gefährden können.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

20050104-0956001

German Language Declaration

VERTRETUNGSVOLLMACHT: Als benannter Erfinder beauftrage ich hiermit den nachstehend benannten Patentanwalt (oder die nachstehend benannten Patentanwälte) und/oder Patent-Agenten mit der Verfolgung der vorliegenden Patentanmeldung sowie mit der Abwicklung aller damit verbundenen Geschäfte vor dem Patent- und Warenzeichenamt: *(Name und Registrationsnummer anführen)*

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*

29177 And I hereby appoint
PATENT TRADEMARK OFFICE

Customer No. 29177

Telefongespräche bitte richten an: *(Name und Telefonnummer)*

Direct Telephone Calls to: *(name and telephone number)*

Ext. _____

Postanschrift:

Send Correspondence to:

Bell, Boyd & Lloyd LLC
Three First National Plaza, 70 West Madison Street, Suite 3300 60602-4207 Chicago, Illinois
Telephone: (001) 312 372 11 21 and Facsimile (001) 312 827 8185
or
Customer No. 29177

Voller Name des einzigen oder ursprünglichen Erfinders:	Full name of sole or first inventor:
DIETER EMMER	DIETER EMMER
Unterschrift des Erfinders / Datum: 12-06-01	Inventor's signature / Date: 12-06-01
Wohnsitz: STARNBERG, DEUTSCHLAND	Residence: STARNBERG, GERMANY DEX
Staatsangehörigkeit: DE	Citizenship: DE ✓
Postanschrift: JOSEF-FISCHHABER-STR.12 82319 STARNBERG	Post Office Addess: JOSEF-FISCHHABER-STR.12 82319 STARNBERG
Voller Name des zweiten Miterfinders (falls zutreffend):	**Full name of second joint inventor, if any:**
ULRICH REHFUESS	ULRICH REHFUESS
Unterschrift des Erfinders / Datum: 12-11-01	Second Inventor's signature / Date
Wohnsitz: MUENCHEN, DEUTSCHLAND	Residence: MUENCHEN, GERMANY DEX
Staatsangehörigkeit: DE	Citizenship: DE ✓
Postanschrift: GEISENBRUNNER STR. 56 81475 MUENCHEN	Post Office Address: GEISENBRUNNER STR. 56 81475 MUENCHEN

(Bitte entsprechende Informationen und Unterschriften im Falle von dritten und weiteren Miterfindern angeben).

(Supply similar information and signature for third and subsequent joint inventors).

Voller Name des dritten Miterfinders:	Full name of third joint inventor:
Dr. BERNHARD WEGMANN	Dr. BERNHARD WEGMANN
Unterschrift des Erfinders Datum 13.12.01	Inventor's signature Date 13.12.01
Wohnsitz	Residence
HOLZKIRCHEN, DEUTSCHLAND	HOLZKIRCHEN, GERMANY DEX
Staatsangehörigkeit	Citizenship
DE	DE ✓
Postanschrift	Post Office Address
WALLBERGSTR. 15	WALLBERGSTR. 15
83607 HOLZKIRCHEN	83607 HOLZKIRCHEN
Voller Name des vierten Miterfinders:	Full name of fourth joint inventor:
Unterschrift des Erfinders Datum	Inventor's signature Date
Wohnsitz	Residence
Staatsangehörigkeit	Citizenship
Postanschrift	Post Office Address
Voller Name des fünften Miterfinders:	Full name of fifth joint inventor:
Unterschrift des Erfinders Datum	Inventor's signature Date
Wohnsitz	Residence
Staatsangehörigkeit	Citizenship
Postanschrift	Post Office Address
Voller Name des sechsten Miterfinders:	Full name of sixth joint inventor:
Unterschrift des Erfinders Datum	Inventor's signature Date
Wohnsitz	Residence
Staatsangehörigkeit	Citizenship
Postanschrift	Post Office Address

(Bitte entsprechende Informationen und Unterschriften im Falle von dritten und weiteren Miterfindern angeben).

(Supply similar information and signature for third and subsequent joint inventors).